

# AVOCENT® MATRIX SWITCHING SYSTEM MOUNTING BRACKET



## Quick Installation Guide

The following instructions help you install your Vertiv™ Avocent® Matrix Switching System mounting bracket. Should you require further assistance, please contact Vertiv Technical Support.

Because mounting surfaces vary, the Matrix switch mounting bracket does not include mounting anchors. For ease of description, it is assumed that wood screws are being used. Depending on the type of mounting surface, a different type of anchor may be needed to secure the mounting bracket.

### ITEMS NEEDED:

- One mounting bracket
- Four #8 screws, minimum 3/4 inch long
- 1/16-inch drill bit

### 1. Preparing the mounting location

Determine the best position for your Matrix receiver. The bracket may be mounted on a vertical or horizontal surface with an appropriate substrate.

**CAUTION:** For safe installation, mount this bracket to a type of material that can easily sustain the weight of the Matrix receiver and attached cables. Please use caution in determining which screws are most suitable to use, taking into account the type of material to which the bracket will be mounted.


**NOTE:** If you are mounting the bracket on a vertical surface, orient it so that the front of the Matrix receiver faces the ceiling rather than the ground.

Mark the holes on the surface where the bracket is to be mounted. Use the holes on the outer edge for maximum strength. Drill four guide holes at the marked positions.

### 2. Attaching the bracket

Hold the bracket in place and insert one screw into each of the four guide holes. Tighten the screws.

Vertiv™ Avocent® Matrix Switching System Mounting Bracket

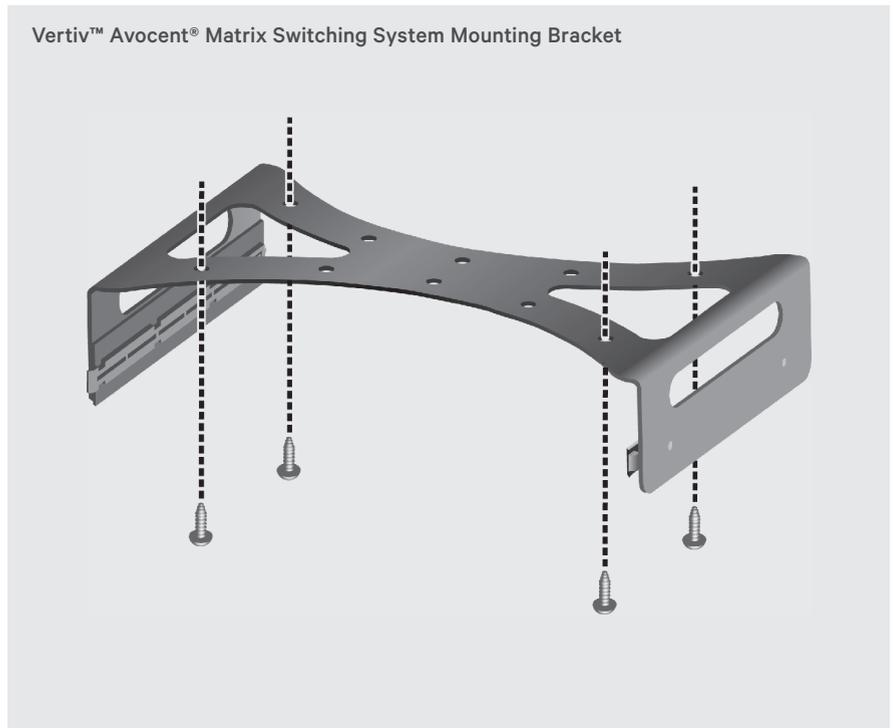

### 3. Installing the Matrix receiver

Line up the end points on the Matrix receiver and slide the unit into the bracket. Plug in any necessary cabling.



**To contact Vertiv Technical Support: visit [www.VertivCo.com](http://www.VertivCo.com)**

© 2017 Vertiv Co. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

